



Aster TB250/TB500

EQUIPMENT PARAMETERS

④ PCS	
Model	PWS1-500KTL-EX
Battery Voltage Range	600 – 900 V
Max. Charging / Discharging Current	880A DC
Nominal Power	500 kW
Rated Voltage	400 V
Grid Voltage Range	400 VAC (±15%)
Power Factor Range	0.99 / -1 ~ 1
Rated Output Frequency	50 Hz / 60 Hz (±2.5Hz)
Dimensions (W×D×H)	1100 × 800 × 2160 mm
Certification	CE (LVD) - IEC 62477, CE (EMC) - IEC 61000, EN 50549-1:2019, G99, AS/NZS 4777
⑤ Transformer	
Model	WT500K
Rated Capacity	500 kVA
Input Voltage	380 V
Output Voltage	400 / 800 V
Group of Connections	Dyn11
Insulation Class	H
Full-Load Efficiency	≥97%
Weight	1300 kg
Dimensions (W×D×H)	1100 × 800 × 2050 mm

The PV inverter in the AC coupling solution can be either customer-furnished or procured from AlphaESS.

Alpha ESS Co., Ltd. ☎ +86 513 8060 6891 ✉ info@alpha-ess.com 🌐 www.alphaess.com 📍 No. 1086 Bihua Road, Tongzhou District, Nantong City, Jiangsu Province, China	Alpha ESS Europe GmbH ☎ +49 610 3459 1601 ✉ deutschland@alpha-ess.de 🌐 www.alphaess.de 📍 Horizon Tower 17.0G Alfred-Herrhausen-Allee 3-5 65760 Eschborn, Germany	Alpha ESS Australia Pty. Ltd. ☎ +61 02 9000 7676 ✉ techsupport@alphaess.au 🌐 www.alphaess.com 📍 8/15-21 Gibbes Street, Chatswood, NSW 2067 Australia	Alpha ESS International Pte. Ltd. ☎ +65 6513 1125 / +65 6513 1126 ✉ Singapore@alpha-ess.com 📍 2 Corporation Road #01-06A Corporation Place 618494 Singapore	Alpha ESS Benelux B.V. contact@alphaess.nl www.alphaess.nl High Tech Campus 41, 5656AE Eindhoven, Netherlands
Alpha ESS Italy S.r.l. ☎ +39 339 462 4288 ✉ info@alphaess.it 🌐 www.alphaess.com Via Del Molinuzzo 83, 59100 Prato (PO), Italy	Alpha ESS UK Ltd. ☎ +44 0330 043 2610 ✉ info@alpha-ess.co.uk Drake House, Long Street, Dursley, GL11 4HH UK	Alpha ESS USA, Inc. ☎ +1 408 368 7828 ✉ usa@alpha-ess.com Unit 5, 2180 S Ivanhoe St, Denver, CO 80222 USA	Alpha ESS Korea Co., Ltd. ✉ info@alpha-ess.com 2F, 19-4, Nohyeong 11-gil, Jeju-si, Jeju-do, Republic of Korea	Alpha ESS South Africa (Pty.) Ltd. measervice@alpha-ess.com La Rocca Office Park, Block B1, 321 Main Road, Bryanston, Johannesburg, 2191, South Africa



YOUR
SMART
ENERGY

Aster TB250/TB500

1000V Liquid-Cooled Energy Storage System

CAPACITY

Battery Module: 52.24 kWh
AC-Coupled 20ft Container | 250–500 kW / 705–1410 kWh




- All-in-One, Pre-Assembled Design
- Easy Installation & Commissioning
- Simple Parameter Configuration
- Intelligent Liquid Cooling Thermal Management
- Multiple Selectable Operating Modes
- 400V / 800V AC Output Options


V2.4.15012026 | Text and images correspond to the current state of technology at the time of printing. Subject to modifications. All information is without guarantee in spite of careful editing - liability excluded.

Aster TB250/TB500

TOPOLOGY DIAGRAM

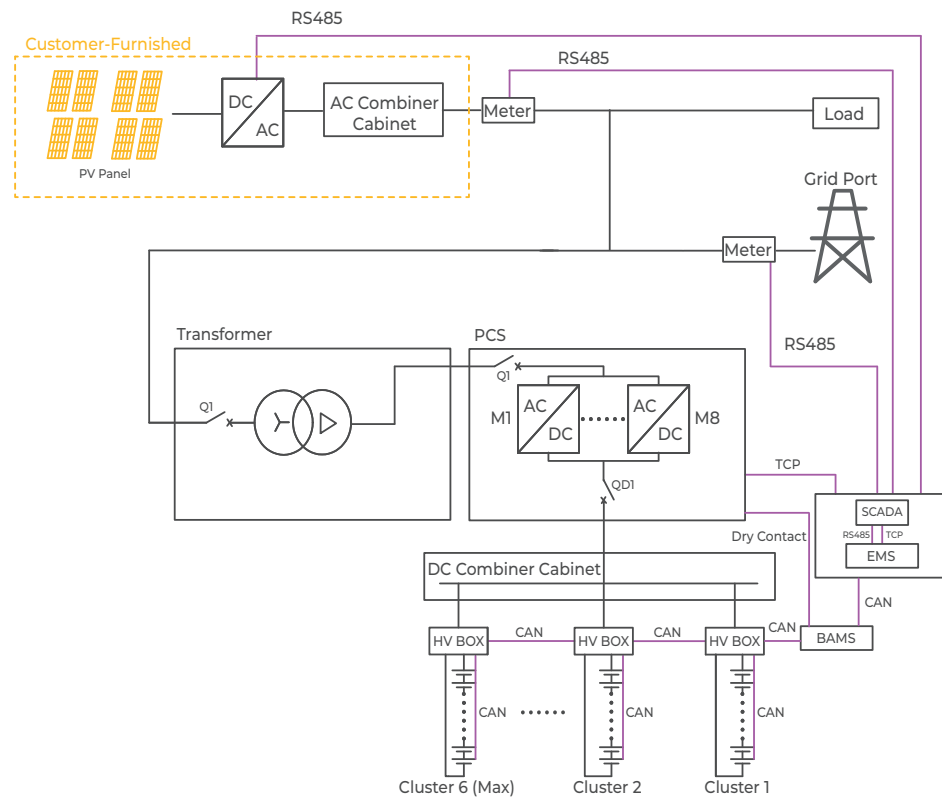

STRUCTURAL DIAGRAM

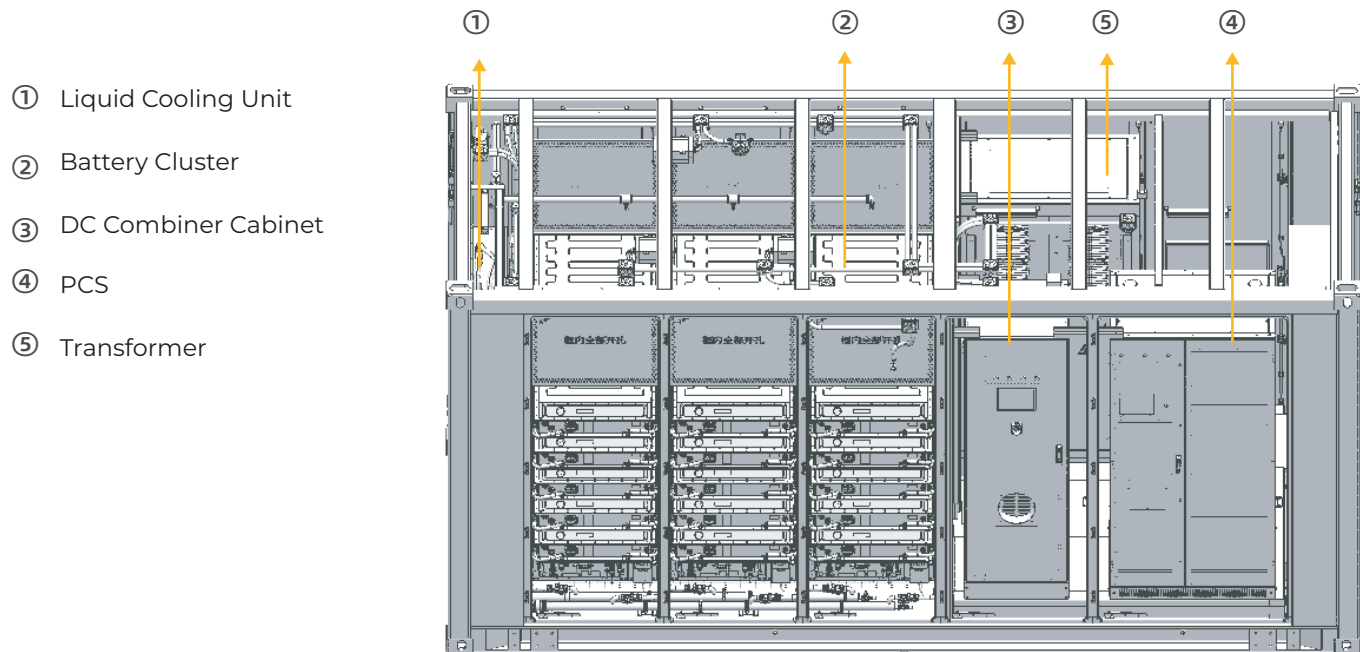

- ① Liquid Cooling Unit
- ② Battery Cluster
- ③ DC Combiner Cabinet
- ④ PCS
- ⑤ Transformer



Aster TB250/TB500



Model	Aster TB500-EX01
DC Parameters	
Nominal Capacity	Max. 1410.73 kWh
Battery Cluster Connection	Max. 6 Clusters in Parallel
Rated Voltage	748.8 VDC
Working Voltage Range	631.8 – 842.4 VDC
Battery Chemistry	LFP (LiFePO ₄)
Battery Cooling Method	Liquid Cooling
AC Parameters	
Rated Charging and Discharging Power	500 kW
AC Current	880 A
AC Frequency	50 Hz / 60 Hz (±2.5Hz)
Rated Grid voltage	400 VAC (±15%)
Physical Parameters	
Dimensions (W × D × H)	6058 × 2438 × 2896 mm
Ingress Protection	IP55
Product Type	Outdoor (Container)
Fire Suppression System	Aerosol
System Weight	23 t
Battery Parameters	
Battery Model	M166314-52S-EX
Rated Voltage	166.4 V
Nominal Capacity	52.24 kWh
Rated Charging and Discharging Power	26.12 kW (0.5 P)
Ingress Protection	IP67
Weight	340 kg
Dimensions (W × D × H)	810 × 1125.5 × 237.5 mm
Operating Temperature Range	-30 °C – 50 °C *
Certification	
Safety	UN38.3, UN3536, IEC 62619, IEC 62477, IEC 61000, UL 9540A

*The optimum temperature range is 15~35 °C. If the ambient temperature is too high or too low, the battery performance may deteriorate.